
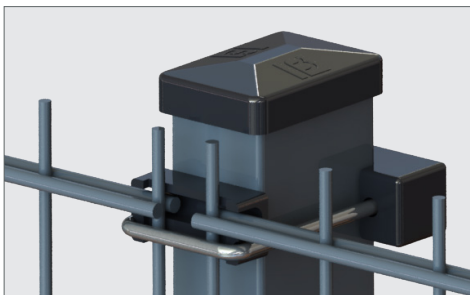
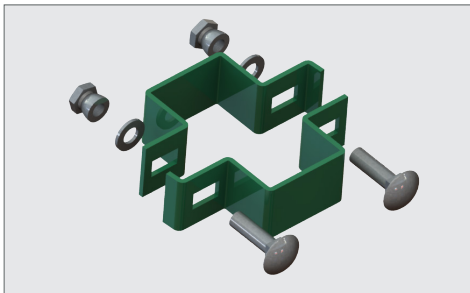


U-LOX posts

Posts

The U-LOX post system is a cost efficient and flexible system. The posts are not pre-drilled, collars can be placed at any height.

Product detail

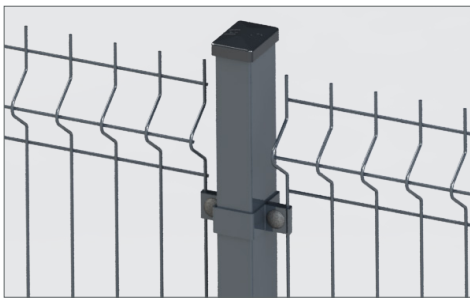

Compatible products

- All Nylofor panels

BENEFITS

- Cost efficient
- Easy installation
- Allows flexibility during installation : flexibility towards slopes
- Free positioning of brackets

Profile

- Post section: 60 x 40 x 1,5 - 2 mm (depending on post length)
- Post without inserts
- Standard plastic post cap with the Betafence logo

Accessories

- Two types of collets: metal one and stainless steel U-Collet
- Collets advised every 400 - 600 mm
- Corner clamps
- Separate base plate

Colours

Standard available in galvanised execution + PES RAL 6005, RAL 7016 and RAL 9005

ASSORTMENT U-LOX				
Height of fence	Post profile (mm)	Length of posts concrete (mm)	Quantity of metal clamps	Quantity of U-brackets
1030	60x40x1,5	1500	2	2
1230	60x40x1,5	1700	2 / 3*	3
1430/1530	60x40x1,5	2000	2 / 3*	3
1630/1730	60x40x1,5	2200	3 / 4*	3
1830/1930	60x40x1,5	2400	3 / 4*	4
2020	60x40x1,5	2600	4	4
2230	60x40x1,5	2800	4	4
2430	60x40x2	3000	4	4

* For panels, 3D Light, 3D Promo, 3D Basic

Europe
Blokkestraat 34b
B-8550 Zwevegem
Tel: B: +32 56 73 46 46
Tel: NL: 0800 022 76 98

USA
3309 SW Interstate 45
Ennis,
TX 75119
Tel: +1 972 878 7000

Middle East
P.O. Box 293517 DAFZA,
Building E 5, Block A
8th Floor, Office 802
Tel: +971 04 6091122

Africa
B10, Bergriver Business Park
Paarl,
7646
Tel: +27 021 868 7300